

12SPX26 12V26.0Ah




Specification


NOMINAL VOLTAGE	: 12 V
NOMINAL CAPACITY(10 hr)	: 26Ah
DIMENSIONS	
TOTAL HEIGHT	: 125 mm
CONTAINER HEIGHT	: 125 mm
LENGTH	: 166 mm
WIDTH	: 175 mm
WEIGHT	: APPROX 9.1 Kg
CONTAINER MATERIAL	: UL94HB ABS
	: UL94V-0 ABS
INTERNAL RESISTANCE(25°C , 77 °F)	: ~8mΩ
DISCHARGE CAPACITY UNDER DIFFERENT TEMPERATURES	
40°C	: ~102%
25°C	: ~100%
0 °C	: ~85%




Cycle numbers VS Depth of discharge (D.O.D)

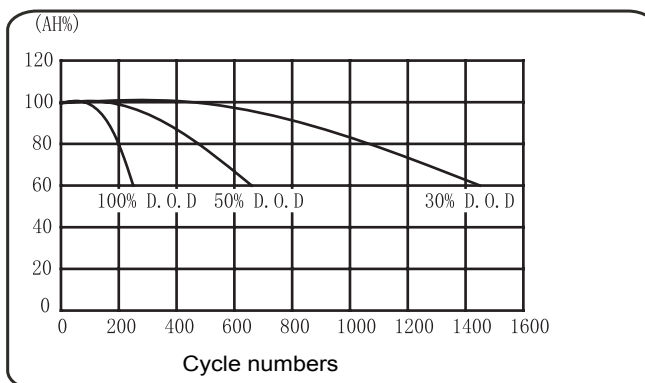

Discharge Characteristics @25°C(77°F)

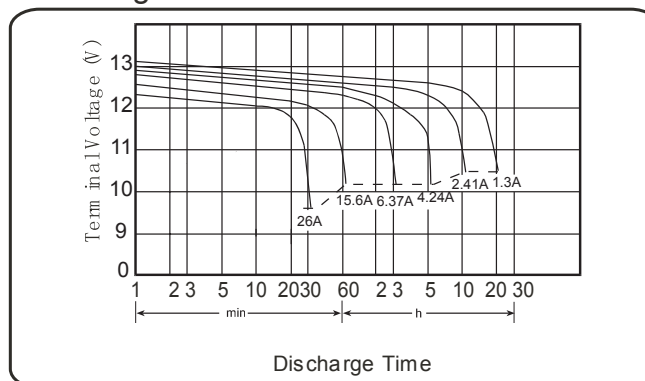


Dimensions

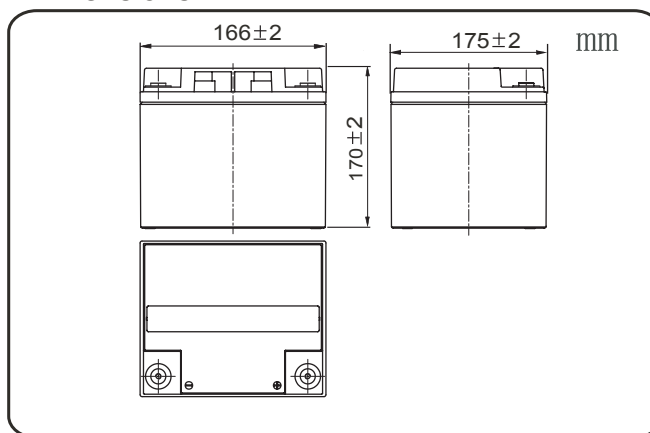

Characteristics

CAPACITY 25°C / 77°F	
20 hr @ 1.3A	: 26 Ah
5 hr @ 4.24 A	: 21.2 Ah
1 hr @ 15.6 A	: 15.6 Ah
1 C @ 26.1 A	: 13.05Ah
CHARGING VOLTAGE (25°C , 77 °F)	
STANDBY USE	: 13.62 V/bloc
FREQUENT DISCHARGE USE	: 14.1-14.4 V/bloc
MAX CHARGING CURRENT	: 6.5 A
SELF DISCHARGE AT20°C: < 2% a month	

Terminal

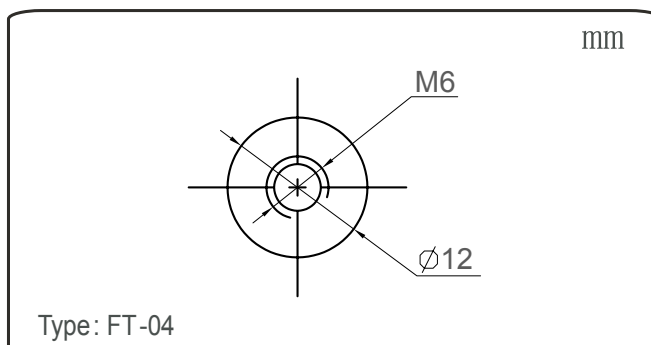

Note: Specifications are subject to change without further notice.